
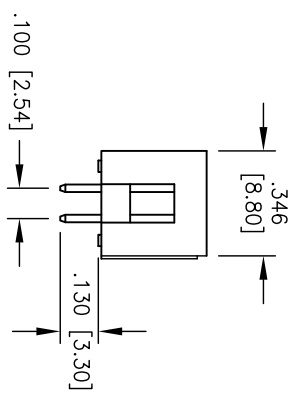
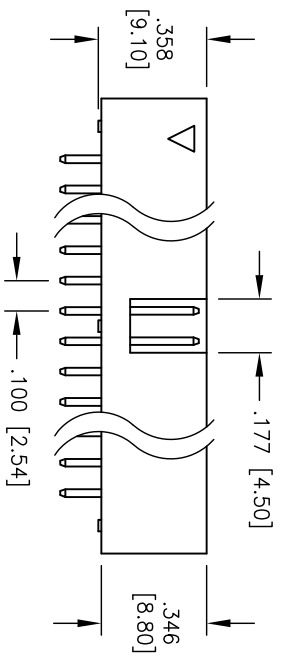
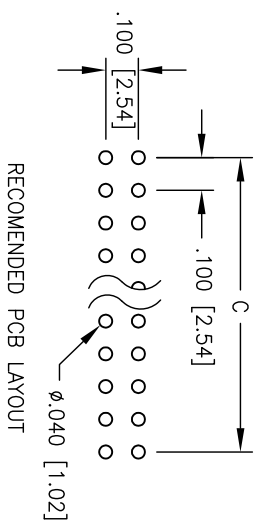


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

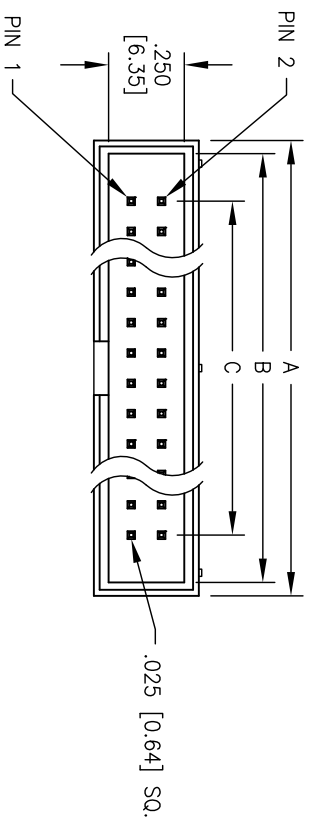

**SPECIFICATION:**  
**Material:**  
 Insulator: PBT, rated UL-94V-0  
 Contacts: Brass  
**Contact Plating:**  
 Gold Flash over Nickel underplate overall  
**Electrical:**  
 Operating Voltage: 250V AC max.  
 Current rating: 1 Amps max.  
 Contact resistance: 20 mohms max  
 Insulation resistance: 5000 Mohms min  
 Dielectric withstanding voltage: 1000 VAC / minute  
**Mechanical:**  
 Mating durability: 500 cycles min.  
**Temperature Rating:**  
 Operating temperature: -55° TO +105°  
 Environmental:  
 Lead free, ROHS compliant.

A = .100 [2.54] X No. of Positions / 2 + .300 [7.60]  
 B = .100 [2.54] X No. of Positions / 2 + .200 [5.08]  
 C = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .10  
 .XX ± .020 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010  
 APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710  
 BOX HEADER, VERTICAL PCB MOUNT,  
 2 ROW .100 PITCH, GOLD FLASH PLATED

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



DRAWN	SS	11/16/04	TITLE	BOX HEADER, VERTICAL PCB MOUNT, 2 ROW .100 PITCH, GOLD FLASH PLATED
CHECKED			SIZE	PART NO.
APPROVED			REF:	BHR-XX-VUA
			SCALE:	NTS
			SHEET:	1 OF 1