
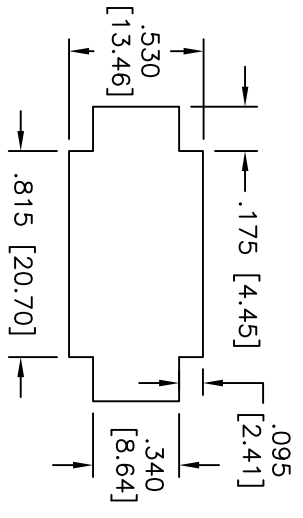
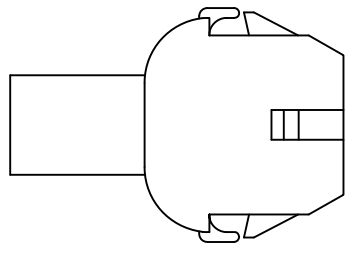
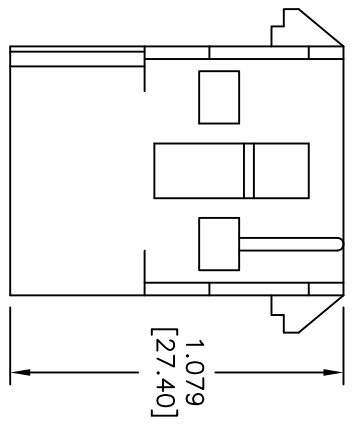



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/19/10	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

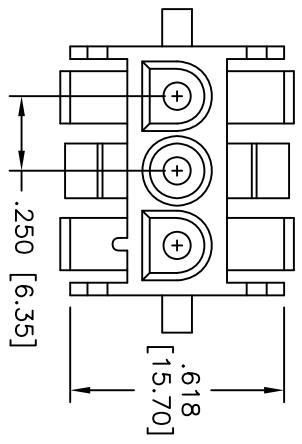

RECOMMENDED PANEL HOLE

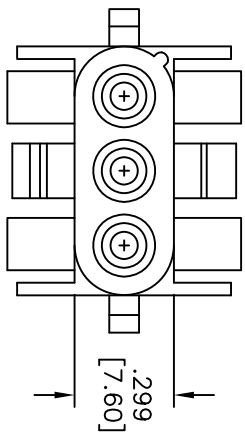

**SPECIFICATIONS:**

**Material:**

Insulator: Thermoplastic, rated UL94V-2

Insulator color: Natural

Contact: Copper Alloy

**Electrical:**

Current rating: 13A

Voltage rating: 600V

Insulation resistance: 1,000 Mohms min.

Withstand voltage: 5000V AC/ minute

Temperature range: -55°C to +105°C

**Environmental:**

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES  
.X ± .10 ØX ± .10  
.XX ± .020 ØXX ± .015  
.XXX ± .015 ØXXX ± .010

APPROVALS DATE

DRAWN DY 11/19/10

CHECKED

APPROVED

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .250 [6.35] WIRE TO WIRE, FEMALE, 3 POLES

SIZE PART NO. DME-F-03 REV.

REF: S00004T SCALE: NTS SHEET 1 OF 1