




Rev	AWO #	Description	Date	Appr
-		RELEASED	9/22/08	





APPROVED: _____
 DATE: _____ TITLE: _____



POSITION=3

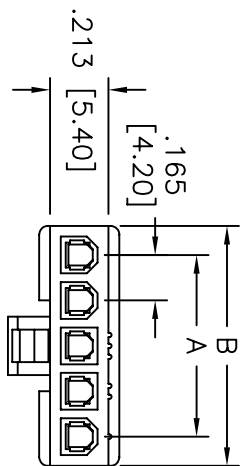

POSITION=2, 4~12

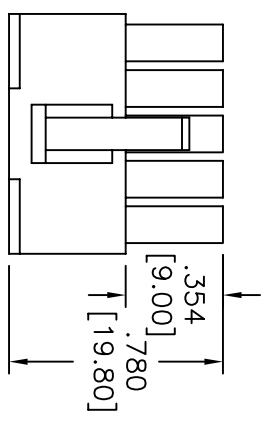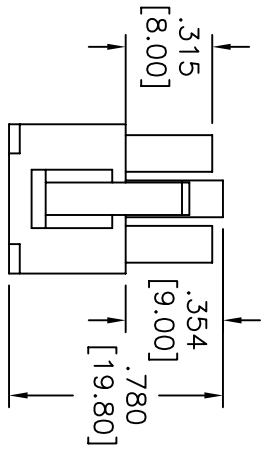

SPECIFICATIONS:

Material: Insulator: Nylon 66, rated UL 94V-2
 Insulator color: Natural

Electrical:

Operating voltage: 600 VAC max
 Current rating: See chart.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1500 VAC for 1 minute

Mechanical:

Temperature Rating: Operating temperature: -40°C to +105°C

Environmental: Lead free, RoHS compliant.

A = .165 [4.20] X No. of Spaces
 B = .165 [4.20] X No. of Positions+ .047 [1.20]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
9/22/08	
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
FEMALE WIRE HOUSING, SINGLE ROW
 .165 [4.20] PITCH



SIZE	PART NO.	REV.
X	DMH-XX-S	-
REF:	SCALE: NTS	SHEET 1 OF 1