
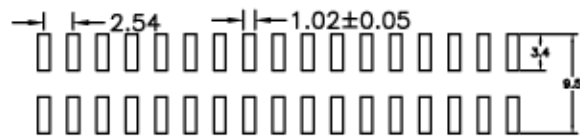
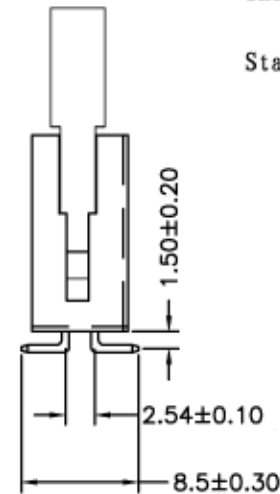
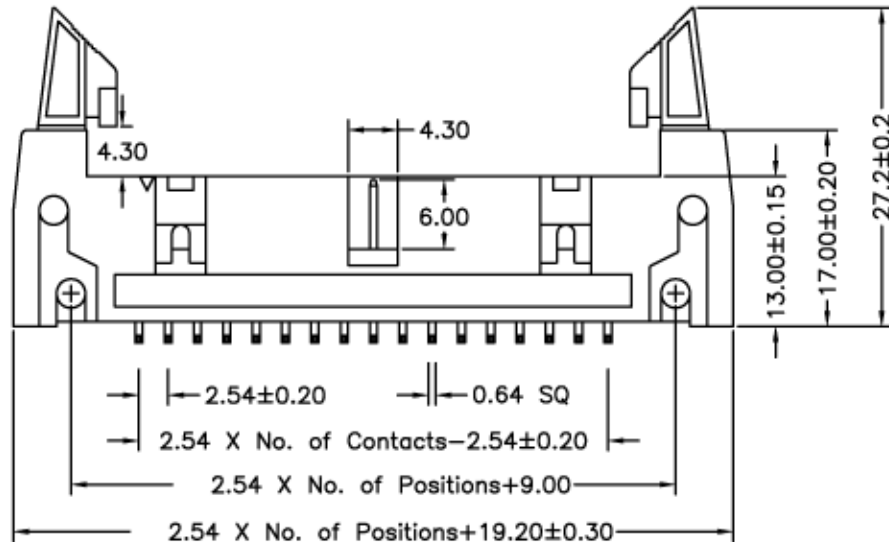


SPECIFICATIONS

Current Rating: 3AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40°C to +105°C

Contact: Brass
 plating: Au or Sn Over 50u" Ni
 Insulator: High Temperature Thermoplastic
 UL94V-0 Rated Black Color
 Standard: PA6T+30%G. F

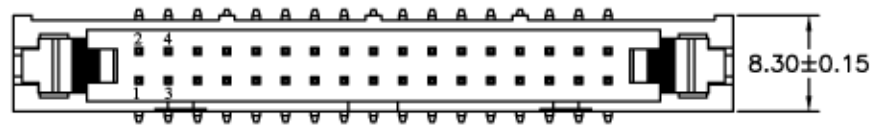

Recommended PCB Layout



TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
X. ±0.3	DRAWN Stephane	2008/09/27	Latch Header SMT Short Latch	Scale N.A.	Sheet 1 of 1
X.X ±0.1	CHECKED Rob K.	2008/09/28			
X.XX ±0.05	APPROVED Rob K.	2008/09/28			
UNLESS OTHERWISE SPECIFIED	UNIT MM	SIZE A4	DRAWING N° G816MXX102EU	REV. A	