



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

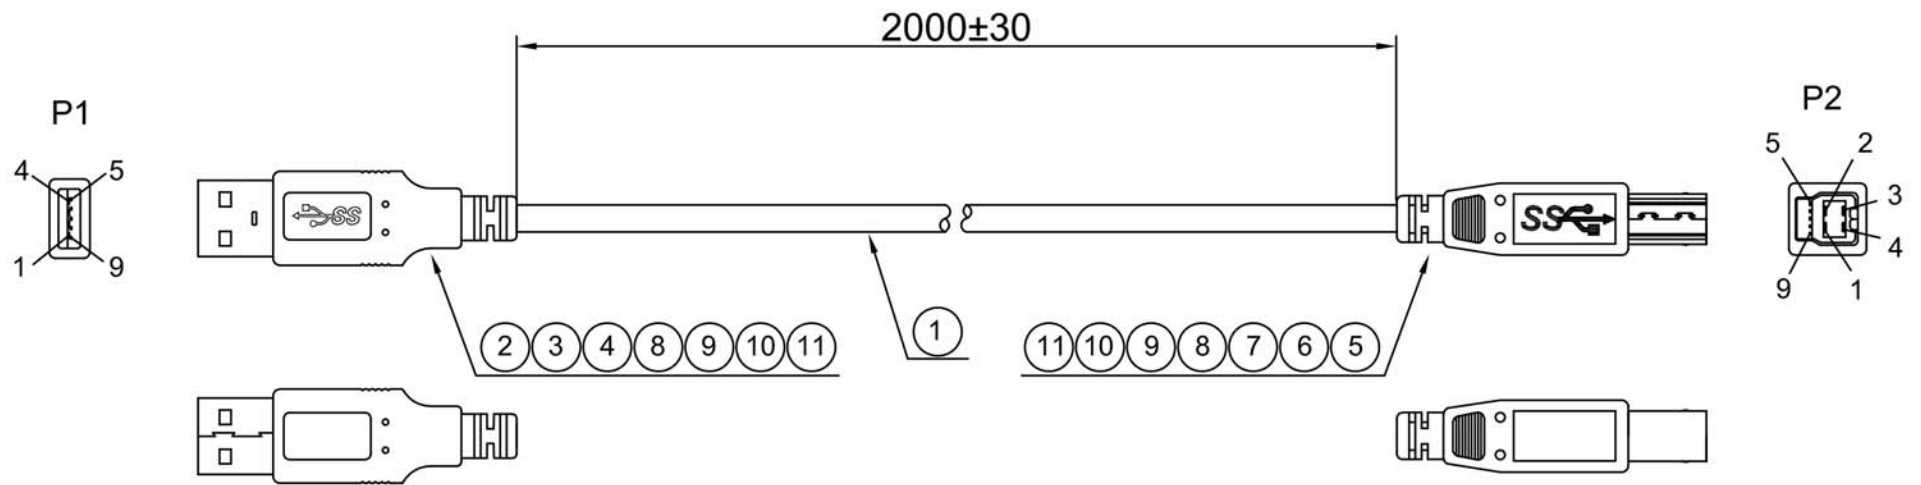

PIN ASSIGNMENT

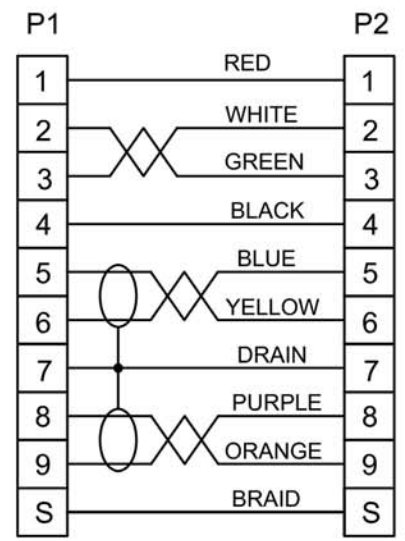

- NOTE:**
- 1.100% TEST OPEN SHORT
 - 2.INSULATION RESISTANCE:10M ohm(MIN)
 - 3.CONDUCTOR RESISTANCE : 1 ohm (MAX)
 - 4.HI POT TEST :300V DC/10ms

NO	DESCRIPTION
11	CONDUCTIVE COPPER FOIL W:20MM
10	HEAT SHRINK TUBE OD:2.0MM BK
9	HEAT SHRINK TUBE OD:0.6MM BK
8	PVC BLUE 50P (USB 3.0)
7	BACK SHELL NICKEL-PLATE (USB 3.0 B/M)
6	FRONT SHELL NICKEL-PLATE (USB 3.0 B/M)
5	USB 3.0 B MALE PBT: BLUE 15U" SHELL: NICKEL PLATED
4	BACK SHELL NICKEL-PLATE (USB 3.0 A/M)
3	FRONT SHELL NICKEL-PLATE (USB 3.0 A/M)
2	USB 3.0 A MALE PBT: BLUE 15U" SHELL: NICKEL PLATED
1	(28#*1P+D+AL .MY)*2C+28#1P+24#2C+AB+JACKET OD:5.5MM BLUE



TOLERANCE (mm)	APPROVALS	DATE	TITLE	Amphenol Amphenol European Design Center	
X.X ±0.30	DRAWN Stephane	14/Apr/2015	USB 3.0 A/M to B/M L:2M	Scale N.A.	Sheet 1 of 1
X.XX ±0.20	CHECKED Rob	14/Apr/2015			
X.XXX ±0.15	APPROVED Rob	14/Apr/2015			
UNLESS OTHERWISE SPECIFIED	UNIT : mm		SIZE : DRAWING N°	TCR-01515-1	
			A4	REV. B	