


- NOTE:**
- 100% TEST OPEN SHORT
 - INSULATION RESISTANCE: 10M ohm(MIN)
 - CONDUCTOR RESISTANCE : 1 ohm (MAX)
 - HI POT TEST : 300V DC/10ms

PIN ASSIGNMENT



NO	DESCRIPTION
11	CONDUCTIVE COPPER FOIL W:20MM
10	HEAT SHRINK TUBE OD:2.0MM BK
9	HEAT SHRINK TUBE OD:0.6MM BK
8	PVC BLUE 50P (USB 3.0)
7	BACK SHELL NICKEL-PLATE (USB 3.0 B/M)
6	FRONT SHELL NICKEL-PLATE (USB 3.0 B/M)
5	USB 3.0 B MALE PBT: BLUE 15U" SHELL: NICKEL PLATED
4	BACK SHELL NICKEL-PLATE (USB 3.0 A/M)
3	FRONT SHELL NICKEL-PLATE (USB 3.0 A/M)
2	USB 3.0 A MALE PBT: BLUE 15U" SHELL: NICKEL PLATED
1	(28#*1P+D+AL .MY)*2C+28#1P+24#2C+AB+JACKET OD:5.5MM BLUE

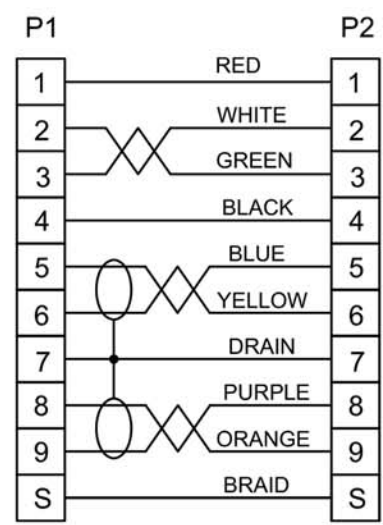

TOLERANCE (mm)	APPROVALS	DATE	TITLE
X.X ±0.30	DRAWN Stephane	14/Apr/2015	USB 3.0 A/M to B/M L:1.5M
X.XX ±0.20	CHECKED Rob	14/Apr/2015	
X.XXX ±0.15	APPROVED Rob	14/Apr/2015	

Amphenol
Amphenol European Design Center

Scale N.A. Sheet 1 of 1

UNIT: mm SIZE: A4 DRAWING N°: TCR-01515 REV: B