




DIN 6799

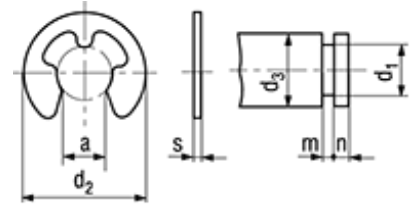

BN 679

Circlips for shafts

bulk

Stainless steel 1.4116 / 1.4122 / 1.4034

- ~UNI 7434
- ~CSN 022929
- 1.4116 / 1.4122 / 1.4034: at manufacturer's option



Fasteners out of martensitic stainless steel (e.g. 1.4116 / 1.4122 / 1.4034): susceptible to stress corrosion cracking under certain environmental conditions!

Article#	d ₁ h11	d ₂ max. fitted	a ± IT 10 not fitted	s	Tolerance	d ₃ min.	d ₃ max.	m min.	n min.
1254464		3,25	1,01	0,3	+/-0,02	1,4	2	0,34	0,6
1254472		4,25	1,28	0,4	+/-0,02	2	2,5	0,44	0,8
1254480		4,8	1,61	0,5	+/-0,02	2,5	3	0,54	1
1254499		6,3	1,94	0,6	+/-0,02	3	4	0,64	1
1254502		7,3	2,7	0,6	+/-0,02	4	5	0,64	1
1254510		9,3	3,34	0,7	+/-0,02	5	7	0,74	1,2
1254529		11,3	4,11	0,7	+/-0,02	6	8	0,74	1,2
1254537		12,3	5,26	0,7	+/-0,02	7	9	0,74	1,2
1254545		14,3	5,84	0,9	+/-0,02	8	11	0,94	1,5
1254553		16,3	6,52	1	+/-0,03	9	12	1,05	1,8
1254561		18,8	7,63	1,1	+/-0,03	10	14	1,15	2
1254588		20,4	8,32	1,2	+/-0,03	11	15	1,25	2
1254596		23,4	10,45	1,3	+/-0,03	13	18	1,35	2,5
1254618		29,4	12,61	1,5	+/-0,03	16	24	1,55	3
1254626		37,6	15,92	1,75	+/-0,03	20	31	1,8	3,5
1254634		44,6	21,88	2	+/-0,03	25	38	2,05	4