


DRAWING



- 1.CABLE:UL2725,USB CABLE,28AWG(7/0.12mm)x1PAIRS
+24AWG(7/0.2mm)x2C,TIN COPPER
SHIELD:AL-FOIL+7/0.1mmDRAIN WIRE+2x16/0.1mm
BRAID TIN COPPER
JACKET:PVC,Ø.D:4.8mm±0.2mm,COLOR:GREY COLOR
- 2.CONNECTOR:2 PCS USB A SOLDER FEMALE GOLD FLASH
- 3.HOOD:MOULDING TYPE,COLOR:GREY
- 4.2 PCS 5 PIN IDE FEMALE,COLOR:BLACK
- 5.USB A FEMALE BRACKET
- 6.4 SETS NUTS
- 7.2 PCS TUBE
- 8.Fulfill ROHS Guideline
- 9.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

PART NO	AK674	SHEET NO	1	THIRD ANGLE PROJECTION		
TITLE:2 *USB A FEMALE TO 2* 5P IDE FEMALE L:0.25M,UL2725,GREY COLOR				SCALE	N.T.S	DRAWN BY & DATE
				SIZE	A4	CHECKED BY & DATE
DWN NO				UNIT		APPROVED BY & DATE
				<input checked="" type="checkbox"/> mm	<input type="checkbox"/> INCH	

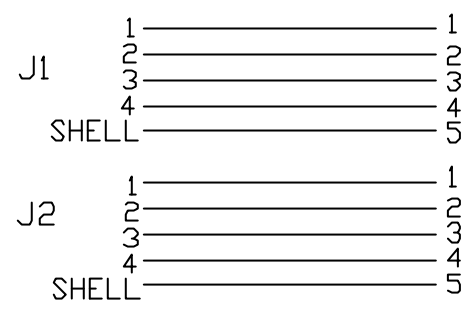