




Encased protection transformers designed mainly for fitting into devices using T-35 bus. Elegant casing, featuring spring bracket significantly facilitates and speeds up attaching. The transformers are made with Class II insulation and protection grade IP30. Maximum ambient temperature 40°C, thermal class of insulation B (130°C). Manufactured in compliance with EN 61558-2-4 and EN 61558-2-6.



Rated power: 10 - 100 VA

Rated voltage PRI: 110 - 500 V 50/60 Hz

Rated voltage SEC: 6 - 250 V

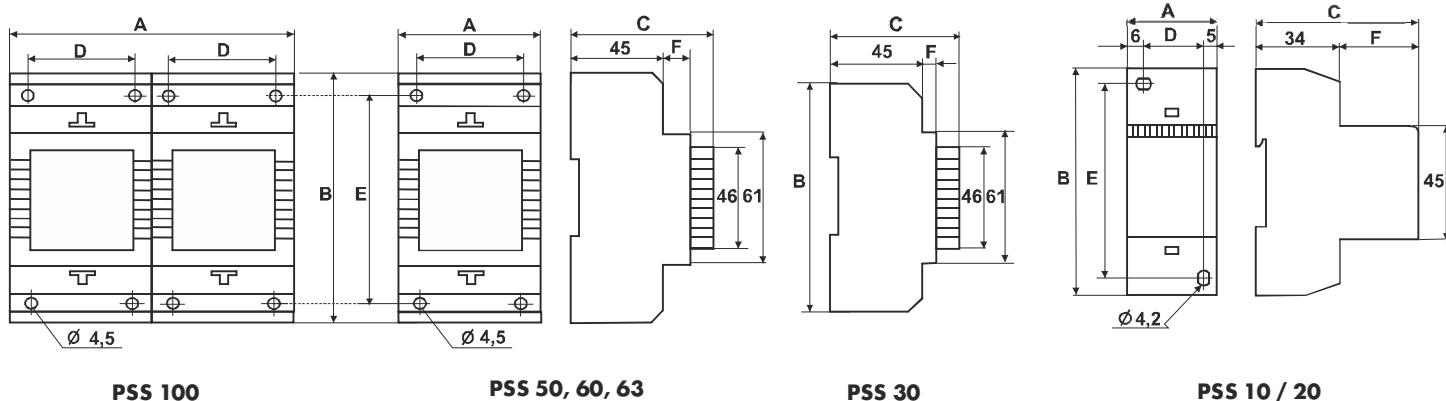

Type	Power (VA)	Dimensions (mm)					Mounting	Weight (kg)
		A	B	C	D	E		
PSS 10	10	35	92	66	24	79	M4	0,32
PSS 20	20	53	110	66	40	88	M4	0,54
PSS 30	30	72	110	63	52	98	M4	1,00
PSS 50	50	72	110	72	52	98	M4	1,10
PSS 60	60	72	110	72	52	98	M4	1,10
PSS 63	63	72	110	72	52	98	M4	1,10
PSS 100	100	144	110	72	52	98	M4	2,20

Type	PRI/SEC			
	230V/ 12V Art. Nr	230V/ 24V Art. Nr	230V/110V Art. Nr	230V/230V Art. Nr
PSS 10	19009-0066	16024-0150	x	x
PSS 20	x	16024-0178	x	x
PSS 30	16012-9983	16024-9997	16045-9978	16052-9991
PSS 50	16012-9981	16024-9994	16045-9999	16052-9990
PSS 60	x	16024-9938	x	x
PSS 63	16012-9976	16024-9979	16045-9983	16052-9980
PSS 100	16012-9975	16024-9973	16045-9973	16052-9977

As a result of constant development of product construction and changes concerning technical requirements, Breve Tufvassons reserves the right to change the parameters mentioned above.