


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/18/06'		

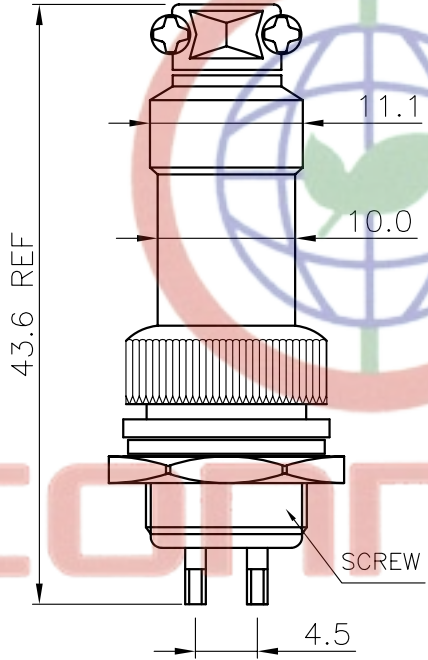

NOTES:


- SPECIFICATION
  - CURRENT RATING: 5A Max.
  - DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
  - CONTACT RESISTANCE: 100mΩ Max.
  - INSULATION RESISTANCE: 1000MΩ(DC)Min
- PRODUCT NUMBER CODE:

DS1110-01 - X X X


CONTACT PLATING  
6: TIN

COLOR OF HOUSING:  
W: WHITE  
B: BLACK


No. OF CONTACTS  
2: 2pin 3: 3pin  
4: 4pin 5: 5pin  
6: 6pin 7: 7pin  
8: 8pin 9: 9pin

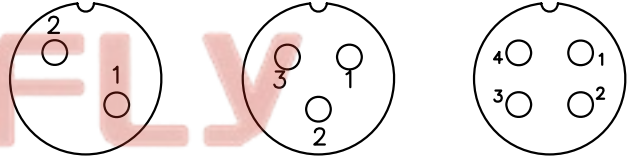

2 PIN                      3 PIN                      4 PIN

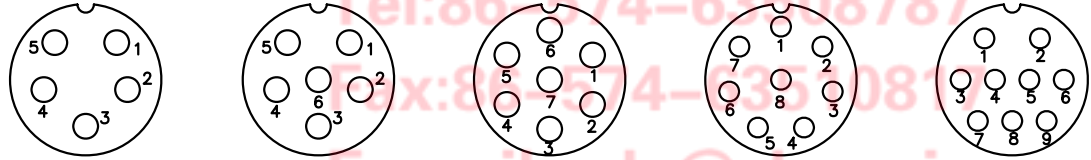

5 PIN                      6 PIN                      7 PIN                      8 PIN                      9 PIN

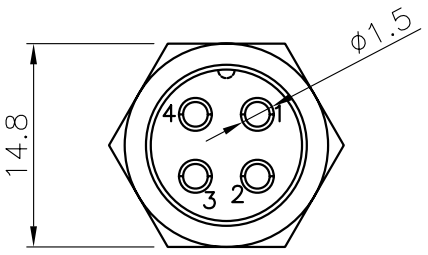

4 PIN

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	MICRO JACK CONNECTOR
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1110-01 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1110-01-XXX				

Tel:86-574-63508787  
 Fax:86-574-63508787  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com