

Anerkannt / Approved:

UL / C-UL
VDE
CCC
BEAB

Drahtanschluss kurz: 36 ± 3 mm (Standard)
Drahtanschluss lang: 68 ± 3 mm (Bsp.H06F-L)

Verpackungsmöglichkeiten:

500 St. in Polybeutel

Leads short: 36 ± 3 mm (Standard)
Leads long: 68 ± 3 mm (e.g.N06F-L)


Packing options:

500 pcs. in plastic bag

TAMURA
ANZEN DENGU CO.,LTD

Bemessungswerte / Ratings


Art.-No.	Produkt – No.	Strom Current	Spannung Voltage	Bemessungstemperatur Functioning open temp. (C°)	Max. Grenztemperatur Max. overshoot temp. (C°)
710.065	H 06 F	2,5 A	250	65	200
710.076	H 0 F	2,5 A	250	76	200
710.086	H 1 F	2,5 A	250	86	200
710.103	H 2 F	3,0 A	250	102	200
710.117	H 110	2,0 A	250	117	180
710.115	H 3 F	3,0 A	250	115	200
710.127	H 4 F	3,0 A	250	127	200
710.133	H 13 F	3,0 A	250	133	200
710.136	H 5 F	3,0 A	250	136	200
710.140	H 6 F	2,5 A	250	139	200
710.145	H 7 F	2,0 A	250	145	200




Dimensions (mm)	Value
A	5.9 ± 0.5
B	6.7 ± 0.5
C	2.5 ± 0.3
D	0.55 ± 0.1
E	36 ± 3.0

*) Long lead type 68 ± 3.0mm [H-F-L]

Functioning Temperature

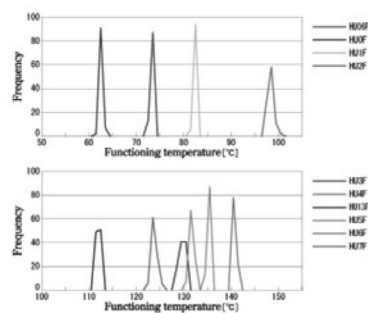

Resistance value

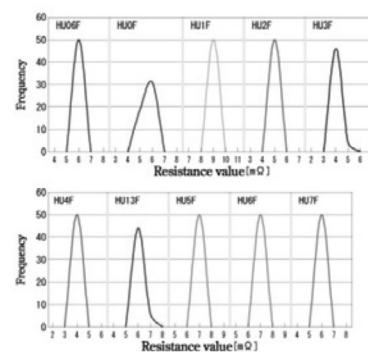

* kein UL / C-UL / no UI / C-UL