



Anerkannt / Approved:

UL / C-UL
VDE
CCC
BEAB

Drahtanschluss kurz: 36 ± 3 mm (Standard)
Drahtanschluss lang: 68 ± 3 mm (Bsp.N06F-L)

Verpackungsmöglichkeiten:

500 St. in Polybeutel

Leads short: 36 ± 3 mm (Standard)
Leads long: 68 ± 3 mm (e.g..N06F-L)

Packing options:


500 pcs. in plastic bag

TAMURA

ANZEN DENGU CO.,LTD

Bemessungswerte / Ratings



| Art.-No. | Produkt – No. | Strom Current | Spannung Voltage | Bemessungstemperatur Functioning open temp. (C°) | Max. Grenztemperatur Max. overshoot temp. (C°) |
|----------|---------------|---------------|------------------|--|--|
| 700.065* | N 06 F | 1 A | 250 | 65 | 200 |
| 700.076 | N 0 F | 1 A | 250 | 76 | 200 |
| 700.086 | N 1 F | 1 A | 250 | 86 | 95 |
| 700.103 | N 2 F | 1 A | 250 | 102 | 200 |
| 700.117 | N 3 F | 1 A | 250 | 115 | 200 |
| 700.127 | N 4 F | 1 A | 250 | 127 | 200 |
| 700.133* | N 13 F | 1 A | 250 | 133 | 200 |
| 700.136 | N 5 F | 1 A | 250 | 136 | 200 |
| 700.140 | N 6 F | 1 A | 250 | 139 | 200 |
| 700.150 | N 7 F | 1 A | 250 | 145 | 200 |





| Dimensions [mm] | Value |
|-----------------|------------|
| A | 4.1 ± 0.5 |
| B | 5.2 ± 0.5 |
| C | 2.0 ± 0.3 |
| D | 0.53 ± 0.1 |
| E | 36 ± 3.0 |

*) Long lead type 68 ± 3.0mm [N-F-L]

Functioning Temperature

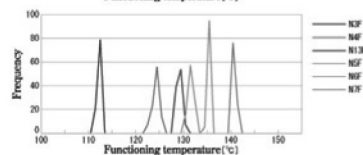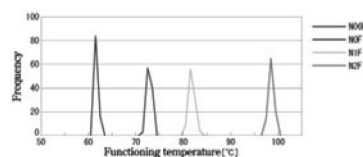

Resistance value

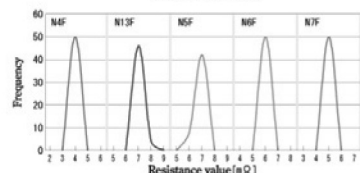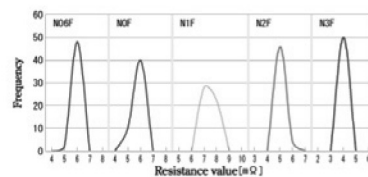

* kein UL / C-UL / no UI / C-UL