05 Series

Slide Switches

HOW TO ORDER SEE PAGE 1

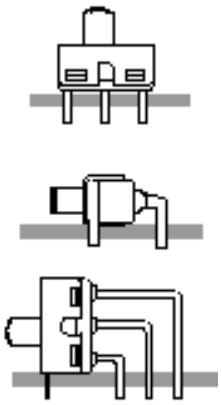

SPECIFICATIONS:
Contact rating: see page 1 or 38
Contact resistance: 10mΩ max. initial @ 2-4VDC, 100mA for both coin silver and gold plated contacts
Electrical life: 30.000 actuations at full load
Insulation resistance: 1.000MΩ min.
Dielectric strengths: 1.500V RMS @ sea level
Operation temperature: -30 ºC to 85 ºC
MATERIALS:
Slide handel: nylon (UL 94V-0)
Housing: stainless steel
Case: diallyl phthalate (DAP) (UL 94V-0)
Terminal seal: epoxy
Switch support: brass, tin plated
Contact materials: see page 1 or 38

SPDT TYPE 1105S1M1RE2

FUNCTION	SWITCH POSITION		
1	ON	NONE	ON
5	ON	NONE	(ON)
2	ON	OFF	ON
TERM. CONN.	2-1	OPEN	2-3

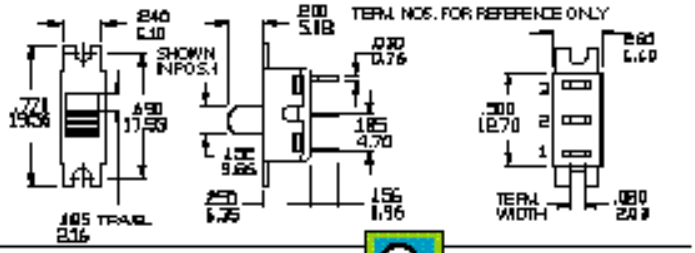

SCHEMATIC: 2 COMM.

DPDT TYPE 2105S1M1QE2

FUNCTION	SWITCH POSITION		
1	ON	NONE	ON
2	ON	OFF	ON
TERM. CONN.	2-1 5-4	OPEN	2-3 5-6

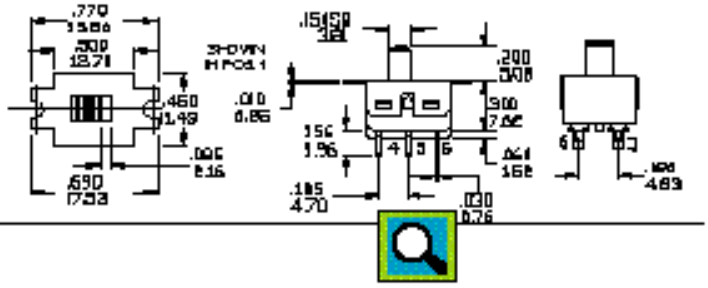

SCHEMATIC: 2 COMM. 5 COMM.

SPDT TYPE 1105S1M6RE2

M6

TERMINATION OPTIONS

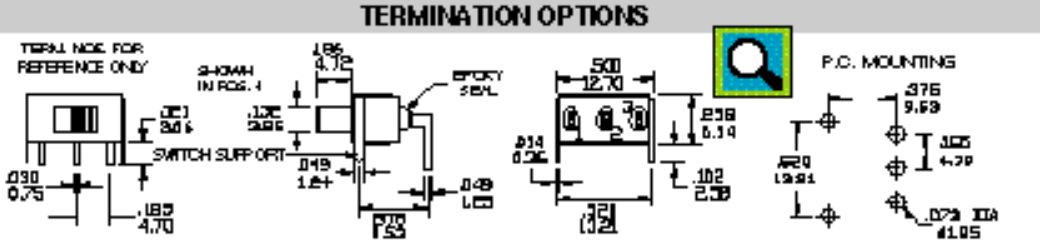

DPDT TYPE 2105S1M6RE2

M6

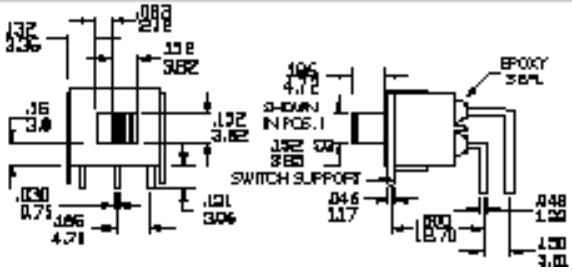

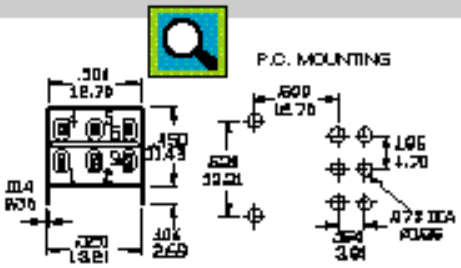

SWITCHES