

08 Series

Sub-Miniature Pushbutton Switches


HOW TO ORDER SEE PAGE 1

SPECIFICATION:

- Contact rating: see page 1 or 51
- Electrical life: 50,000 make-and-break cycles at full load
- Contact resistance: 20mΩ max. initial @ 2-4V(DC), 100mA for both coin silver and gold plated contacts
- Insulation resistance: 1.000MΩ min.
- Dielectric strength: 1.500V RMS @ sea level
- Operating temperature: -30 °C to 85 °C

MATERIALS:



- Plunger: thermoplastic polyester (UL 94V-0)
- Bushing: brass, nickel plated
- Housing: stainless steel
- Case: diallyl phthalate (DAP) (UL 94V-0)
- Terminal seal: epoxy
- Cap and frame: nylon (UL 94V-0)
- Mounting bracket: stainless steel
- Switch support: brass, tin plated
- Contact materials: see page 1 or 51



SPST TYPE 1908P1B5M1RE




FUNCTION	SWITCH POSITION	
9	OFF	MOM
TERM. CONN.	OPEN	1-3

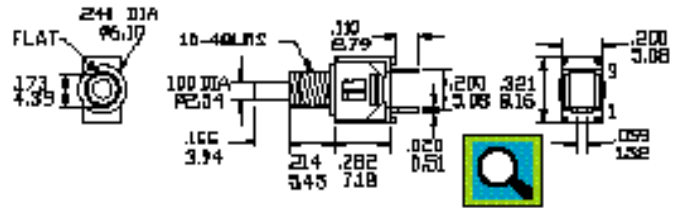


SPST TYPE 1908P1B6M6RE



TERMINATION OPTIONS

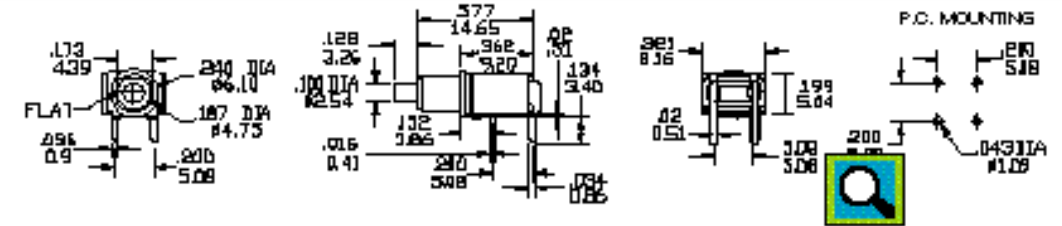




SPST TYPE 1908P1B6M7RE

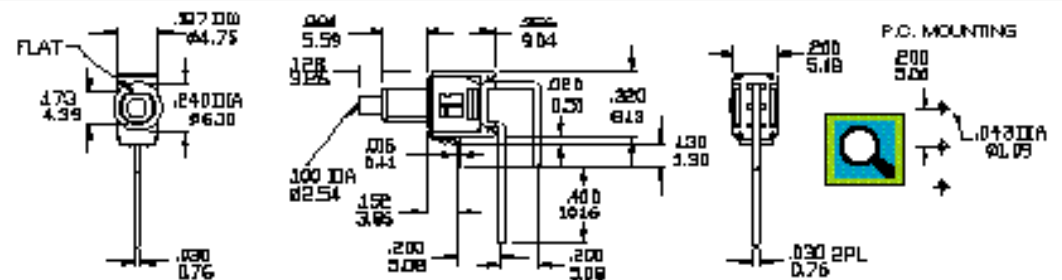

SPST TYPE 1908P1B6VS2RE



VS2

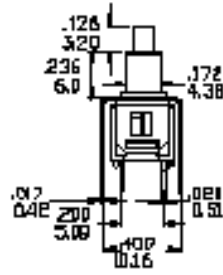

SWITCHES