




ROHS-COMPLIANT



LTR	REV.	DESCRIPTION	DATE
	C	ECR # 061123-5 ADD LENGTH	11/23/06
	D	ECR # 061218-6 ADD CABLE P/N	12/18/06

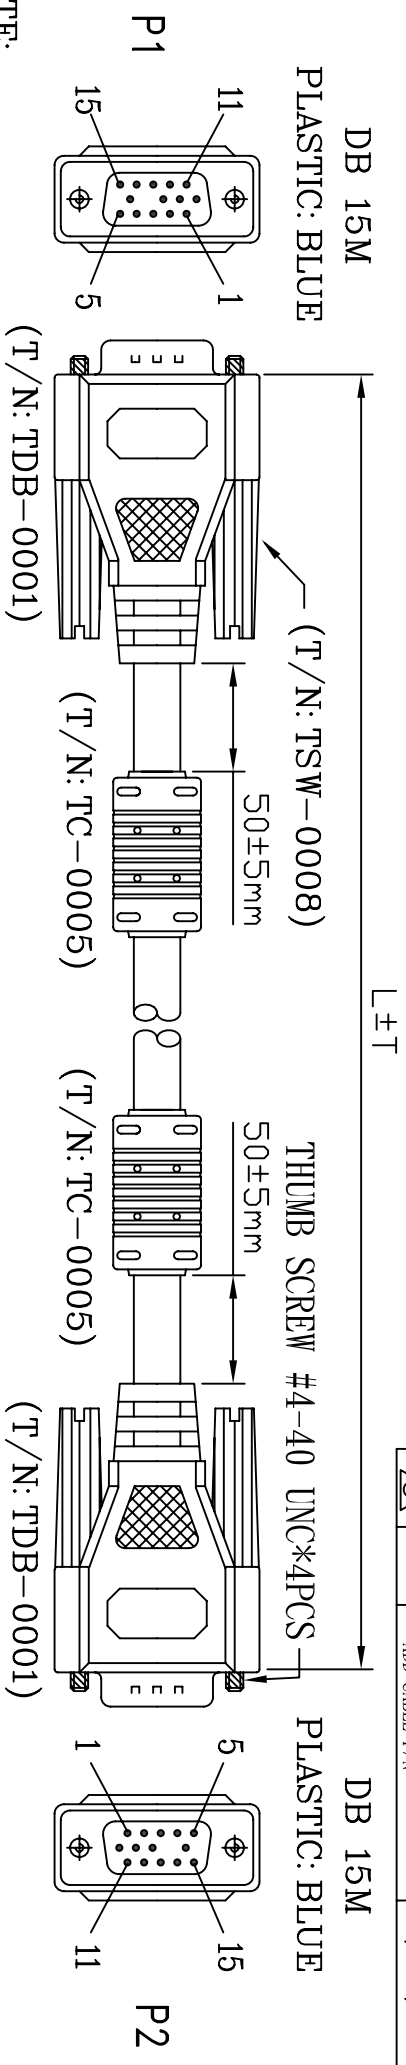

NOTE:

1. CABLE: UL 2919[30AWG(7/0.102 T.C)*1C INS: FOAM-PE ID:1.3±0.05 + SPIRAL(T.C)]*3C INS: PVC ID:2.3±0.1+28AWG(7/0.127 T.C)*7C + INS: SR-PVC ID: $\phi 0.9 \pm 0.05 \text{mm} + \text{AL/MY} + \text{DRAIN } 30\text{AWG}(7/0.102 \text{ T.C}) + \text{BRAID } (16/4/0.1 \text{ T.C}) + \text{OUTER JACKET: PVC COLOR: BLACK(NK-K01)} \text{ OD: } \phi 7.5 \pm 0.15 \text{mm, (C2919283BA)}$
2. CONNECTOR: P1&P2: HDB 15P MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL. 9TH PIN IS EMPTY.
3. FERRITE CORE: 17.5*28.5*9.5mm.
4. SHIELD: COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID.
5. HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01).
6. ELECTRICAL TEST: 100% OPEN SHORT MIS WIRE TEST. CONTACT RESISTANCE 3Ω MAX
7. PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL <2>EACH CARTON / ROHS LABEL(L*W=35*22mm)

PIN OUT		P1		P2	
1	RED	10	ORANGE	10	ORANGE
2	GRAY	11	WHITE	11	WHITE
3	BLUE	12	YELLOW	12	YELLOW
4	BROWN	13	GREEN	13	GREEN
5	BLACK	14	RED	14	RED
			BRAID	14	RED
			SHELL		SHELL
			CENTER		
			SHIELDING		

120-2620-6	CY0018	20000±200mm	4260113562394	
120-2620-5	CY0017	15000±150mm	4260113562512	
120-2620-4	CY0016	10000±100mm	4260113562505	
120-2620-3	CY0003	5000±50mm	4260113560204	
120-2620-2	CY0002	3000±30mm	4260113560198	
120-2620-1	CY0001	1800±30mm	4260113560181	
DWG	P/N	L±T	EAN CODE	

Tolerance Inch M/M		Title	
X	.015 .30	2DIRECT GMBH	
.XX	.010 .10	HDB 15M/M CABLE	
.XXX	.005 .05		
Draw	FANNIE 12/18/06	Customer P/N	
App'd		Customer E-DIR	
Scale	NONE	Units	m/m Third Angle Projection
Dwg No.	120-2620	REV:ID	Sheet 1/2