


ELECTRICAL TEST:

- 1、100%% SHORT&OPEN&MIS WIRE TEST.
- 2、CONTACT RESISTANCE: 2 ohm(MAX).
- 3、INSULATION RESISTANCE: DC 300V 10M ohm(MIN).




Packing:
1PC in one PE Bag with Logilink sticker

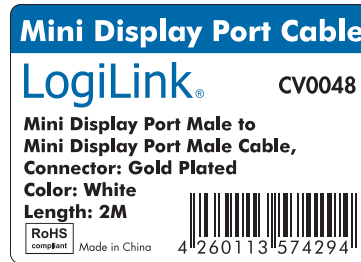

Pantone 2945C
Black
Size: 70 x 50 mm
R= 2mm

PIN Assignment

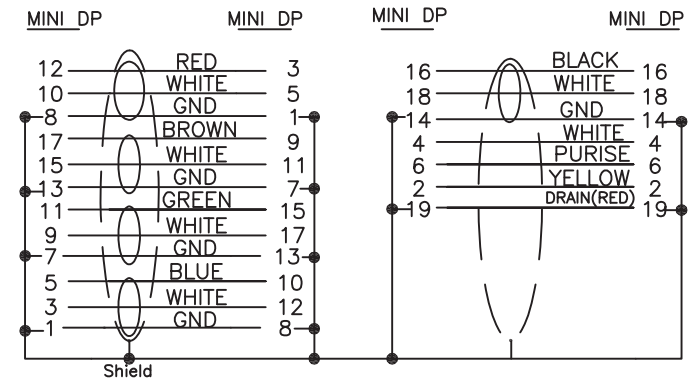

REV.	DESCRIPTION		DATE	
8	A6-0000157	mini Display Port M DUST CAP	2	pcs
7	A6-R104240	mini DisplayPort(SOLDER) M ABS UP SHELL SNOW WHITE NO MARKING	2	pcs
6	A6-R104239	mini DisplayPort(SOLDER) M ABS TOP SHELL SNOW WHITE NO MARKING	2	pcs
5	A5-R047107	45P SNOW WHITE PVC	8	g
4	A6-R021133	mini Display Port M BACK SHEL NICKEL PLATED	2	pcs
3	A6-R021212	mini Display Port M FRONT SHELL GOLD PLATED	2	pcs
2	A2-R021292	mini DisplayPort M INSULATION:WHITE PIN GOLD PLATED WITH PCB	2	pcs
1	A4-R001678	Display Port UL20276 [32AWG(7/0.08TC)*1PR+EAM)*5+32AWG(7/0.08TC)*5C +AEB 85% (16/7/0.12AL) OD:4.8MM SNOW WHITE	2	M
NO	P/N	DESCRIPTION	Q'TY	UNIT

REV.	TOLERANCE		DESCRIPTION		DATE
	INCHES		M/M		2direct GmbH TITLE: MINI DP M TO MIMI DP M CABLE CUSTOMER : CUSTOMER P/N : CV0048 SCALE NONE UNIT MM DATE 11.02.16 DRAWING NO.: CA0010259 REV. A
	.X	.015	.30		
	.XX	.010	.10		
	.XXX	.005	.05		
DRAWN BY	alex				
CHECK BY					
APPD BY					