


Magnetic Transducer

SMT32 series



DIMENSIONS

Date : 5 Jul, 2007

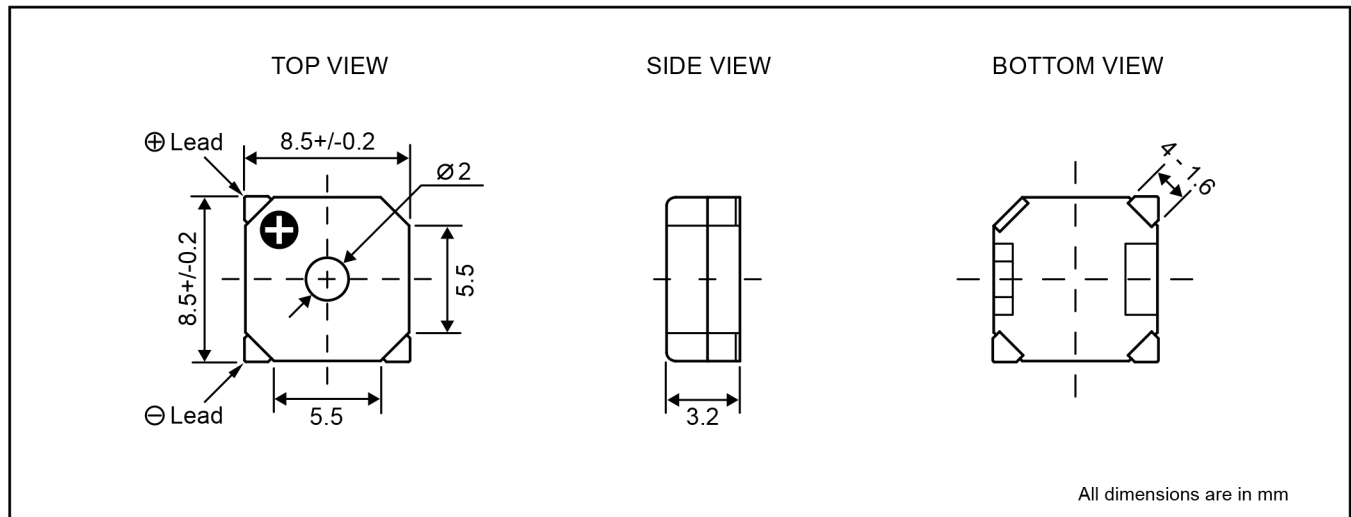

Ref no. : CS136-R
 Remark : RoHS compliance

ELECTRICAL SPECIFICATIONS

Model No.	LD-BZEL-T32-0803
Operating Voltage □ □ [V]	2 ~ 4
Rated Voltage □ □ [V]	3
* Max. Rated Current □ [mA]	80
Coil Resistance □ [ohm]	15 +/- 3
* Min. Sound Output □ [dBA /10cm]	85
Resonant Frequency □ [Hz]	2731
Operating Temperature □ [°C]	-30 ~ +85
Storage Temperature □ [°C]	-40 ~ +90
Terminal	SMD
Housing Material	LCP
Colour	Black
Weight □ [gm]	0.6

* Value applying rated voltage [resonant frequency, 1/2 duty, square wave] and recommended circuit [HFE >200, min.2.5mA]