




Visual Signals XENON BEACONS

Industrial Xenon Beacons > X125 DIN Base Series

Product overview

The X125 Din Base Series utilises a discharge capacitor and converter circuit to ignite xenon gas inside a tube, resulting in a brilliant flash of light. Xenon gas ignites virtually instantaneously so maximum brightness is obtained

immediately. Xenons have an added advantage of low current consumption combined with a reasonable life span. The design of the X125 Din Base Series ensures a 360-degree light output. Xenon beacons are one of the most efficient, effective and brightest visual signals available.

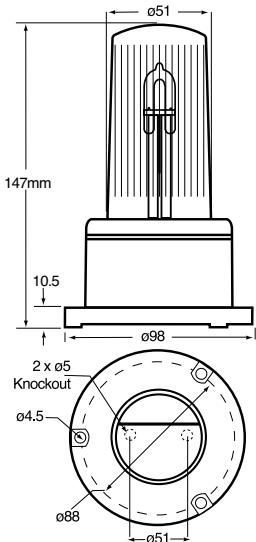

FEATURES

- Continuously rated
- Suitable for surface mounting
- Optional protective guard available - see accessory page
- 360° visibility
- Three-point fix external
- IP65

MATERIAL

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
X125-64	10-100v Dc --- 20-72v Ac ~	Xenon 2.0J	130 mA*
X125-62	115v Ac ~	Xenon 2.3J	30 mA
X125-63	230v Ac ~	Xenon 2.7J	21 mA

*at 24v Dc ---



Kg 0.25

~ 50/60 **Hz**

°C -25+66

IP 65

FPM 60

INDUSTRIAL

APPROVAL AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO
THE PRODUCT CODE WHEN ORDERING

01

02

03

04

05