
### OSOLRA2045M

### **■Features**

• 45  $^{\circ}$  focusing angle

# **Applications**


• Non long range lighting with medium area

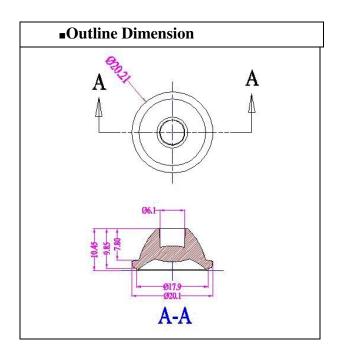

## **■**Specification

Item	Value
Transmittance	93%
Material	PMMA
Standard	SGS/ROHS
Temperature	-35°℃ -90°℃
Surface Treatment	Matt

### **■ Photos**





### ■ Beam Pattern



ERROR: undefined

OFFENDING COMMAND: f'~

STACK: