


Pin Contacts, 3.5 mm Diameter

**Pin Contact,
Mates with
3.5 mm Diameter
Socket Contact**

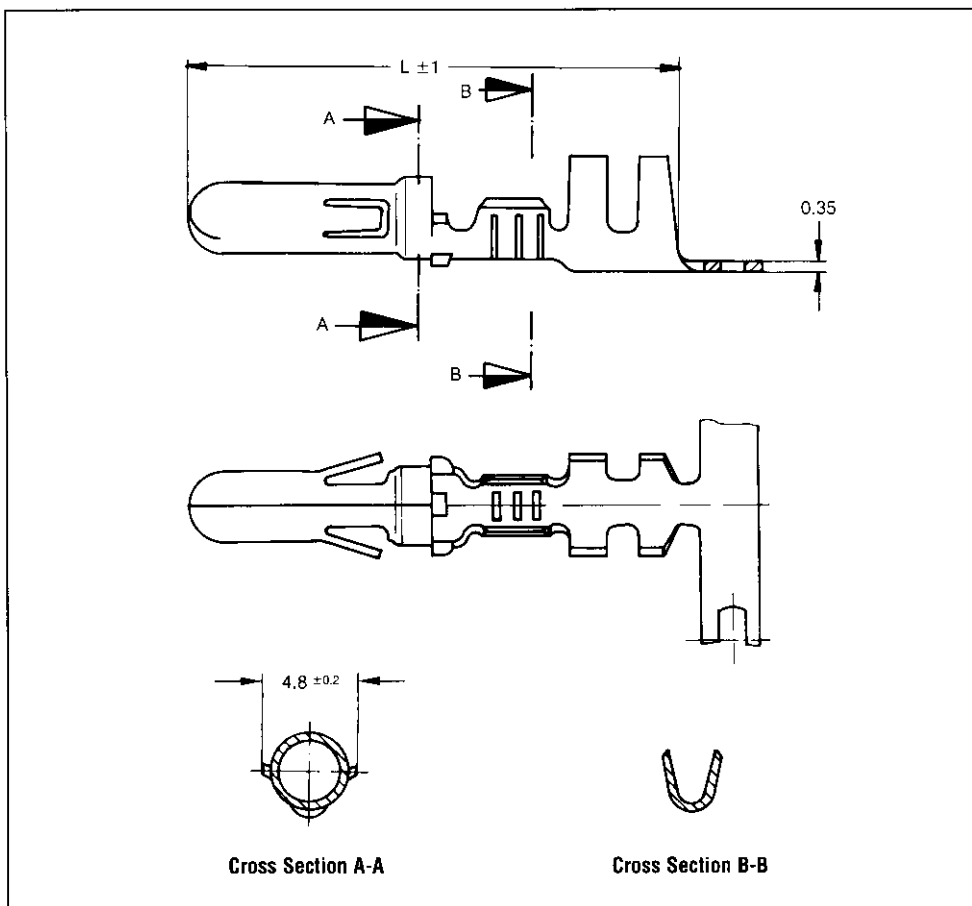

Pin Contacts

Wire Size Range (mm ²)	Insulation Diameter (mm)	Socket L (mm)	Material and Finish	Part Numbers				Applicator	Hand Tool 539635-1 with Die Set
				Strip Form	Packaging Unit	Loose-Piece	Packaging Unit		
0.5-1.0	1.4-2.3	25.0	CuSn, pre-tin plated	927841-2	7,500	927842-2	2,000	872090	539669-2
0.5-1.5	1.2-2.4	25.0	CuZn, pre-tin plated	926988-1	7,500	926989-1	2,000	871097	90247 ♦
			CuSn, pre-tin plated	926988-2	7,500	926989-2	2,000		
0.5-2.1	2.5-4.5	25.0	CuZn, pre-tin plated	925715-1	7,500	925660-1	500	878037	90247 ♦
		25.0	CuSn, pre-tin plated	925715-2	7,500	925660-2	500		
		26.6	St4 K 50, CuSn	925715-5*	7,500	925660-5*	500		
>1.0-2.5	2.1-3.1	25.0	CuSn, pre-tin plated	927858-2	7,500	927859-2	500	872091	-
	2.7-4.0	25.0	CuSn, pre-tin plated	927873-2	10,000	927874-2	500	878046	-
2.1-5.3	2.5-4.5	25.0	CuZn, pre-tin plated	925713-1	7,500	925662-1	500	878031	825582 ♦
			CuSn, pre-tin plated	925713-2	7,500	925662-2	500		

*) For Ambient Temperatures up to +120 °C and 17 Ampere

♦) Complete Hand Tool

***) With Grounding Pin