
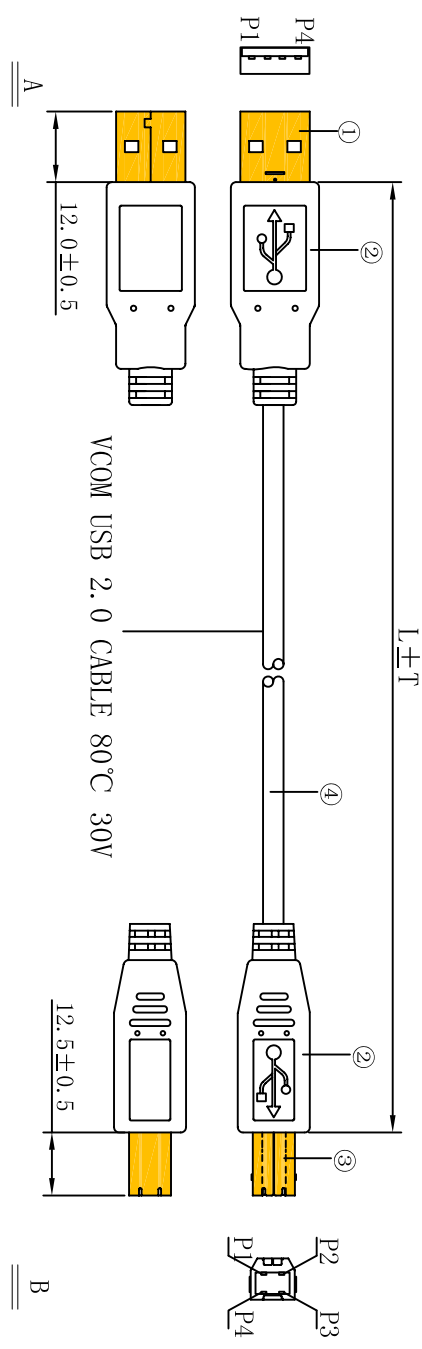


|     |               |            |
|-----|---------------|------------|
| REV | DESCRIPTION   | DATE       |
| A/0 | Initial issue | 2016-03-22 |
|     |               |            |
|     |               |            |

WIRING TABLE:

|            |          |
|------------|----------|
| <u>A</u>   | <u>B</u> |
| 1 ---Red   | 1        |
| 2 ---White | 2        |
| 3 ---Green | 3        |
| 4 ---Black | 4        |
| G ---DW+BD | G        |

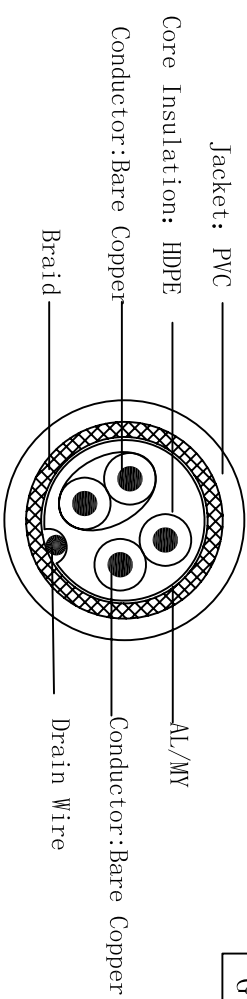

| 序号 | 线材长度 (T) | 线材公差 (T) |
|----|----------|----------|
| 1  | 1500MM   | 20MM     |
| 2  | 1800MM   | 20MM     |
| 3  | 3000MM   | 30MM     |
| 4  | 4500MM   | 50MM     |
| 5  | 5000MM   | 50MM     |

Test Conditions:  
1. 100% open & short circuit test;  
2. Insulation Resistance: 2.0Mohm (MIN);  
3. Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S.

|    |  |     |       |
|----|--|-----|-------|
| ④  | CABLE:1P+2C+AL/MV+DW+BD, OD:4.5mm, PVC JACKET, BLACK   | M   | 1.5-5 |
| ③  | USB B MALE SOLDERING TYPE, GOLD-PLATED PBT WHITE COLOR | SET | 1     |
| ②  | OVER MOLDING: PVC-50P BLACK PVC                        | g   | 12.96 |
| ①  | USB A MALE SOLDERING TYPE, GOLD-PLATED PBT WHITE COLOR | SET | 1     |
| 编号 | 材料内容   | 单位  | 数量    |
| 5  | 4  | 3   | 2     |

**VCOM** VCOM INTERNATIONAL LTD.

|                |               |              |     |      |            |
|----------------|---------------|--------------|-----|------|------------|
| ITEM           | USBAM/BM 2.0V | CUSTOMER     | ETE | mm   | PAGE: 1of1 |
| PART NO.       |               | CUSTOMER NO. |     |      |            |
| PRODUCT NO.    |               | REV:         | A/0 | DATE | 2016-03-22 |
| DRAWN BY: CHEN | CHECKED BY:   | APPROVED BY: |     |      |            |