



Part no.
Article no.

SL4-L230-G
171326

Catalog No.

SL4-L230-G

Delivery programme

Product range
Basic function
Protection type
Rated operational voltage
Type of light
Light elements
Colour

U_e


V

SL4 signal towers
Card with LED
IP66
230/240 V AC
Continuous light
LED

green



Function



Connection to SmartWire-DT

no

Approvals

Product Standards
UL File No.
UL Category Control No.
CSA File No.
CSA Class No.
North America Certification
Degree of Protection

IEC/EN 60947-5-1; UL 508; CSA-C22.2 No. 14-10; CSA-C22.2 No. 94-91; CE marking
E29184
NKCR
UL report applies to both US and Canada
NKCR7
UL listed, certified by UL for use in Canada
UL Type 4, 4X, 13

General

Standards

Climatic proofing

Mounting position

Mechanical shock resistance

IEC degree of protection

Protection type UL

Material

Cap colour

Ambient temperature

Number of signal elements

Weight

		IEC/EN 60947-5-1
		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60069-2-30
		As required
	g	> 15 according to IEC 60068-2-27 Shock duration 11 ms Sinusoidal
		IP66 IEC/EN 60529
		Type 4, 4X, 13
		Enclosure: Polycarbonate (PC), black Cap: Polycarbonate (PC)
		green
	°C	-30 - +60
		Max. 5 with standard base Max. 10 with base for mounting on both sides
	g	45

Contacts

Rated impulse withstand voltage

Rated insulation voltage

Overvoltage category/pollution degree

U _{imp}	V AC	4000
U _i	V	250
		III/3

Module

Type of light

Light elements

		Continuous light
		LED

Leakage current	A	< 0.003
lifespan	h	> 100000
Transmission angle		360°
Current-/power consumption		
230 /240V AC	A	0.030
Voltage levels		230/240 V AC ± 10 %

Technical data ETIM 5.0


Low-voltage industrial components (EG000017) / Optical module for signal tower (EC000232)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Optical module for signal tower

(eci@ss8-27-37-12-20 [AKF038010])

Function		Continuous light
Colour		Green
Outer diameter	mm	43
Degree of protection (IP)		IP66
Operating voltage at AC 50 Hz	V	230 - 240
Operating voltage at AC 60 Hz	V	230 - 240
Operating voltage at DC	V	0 - 0
Voltage type		AC
Type of lamp		LED
Colour housing		Black

Dimensions

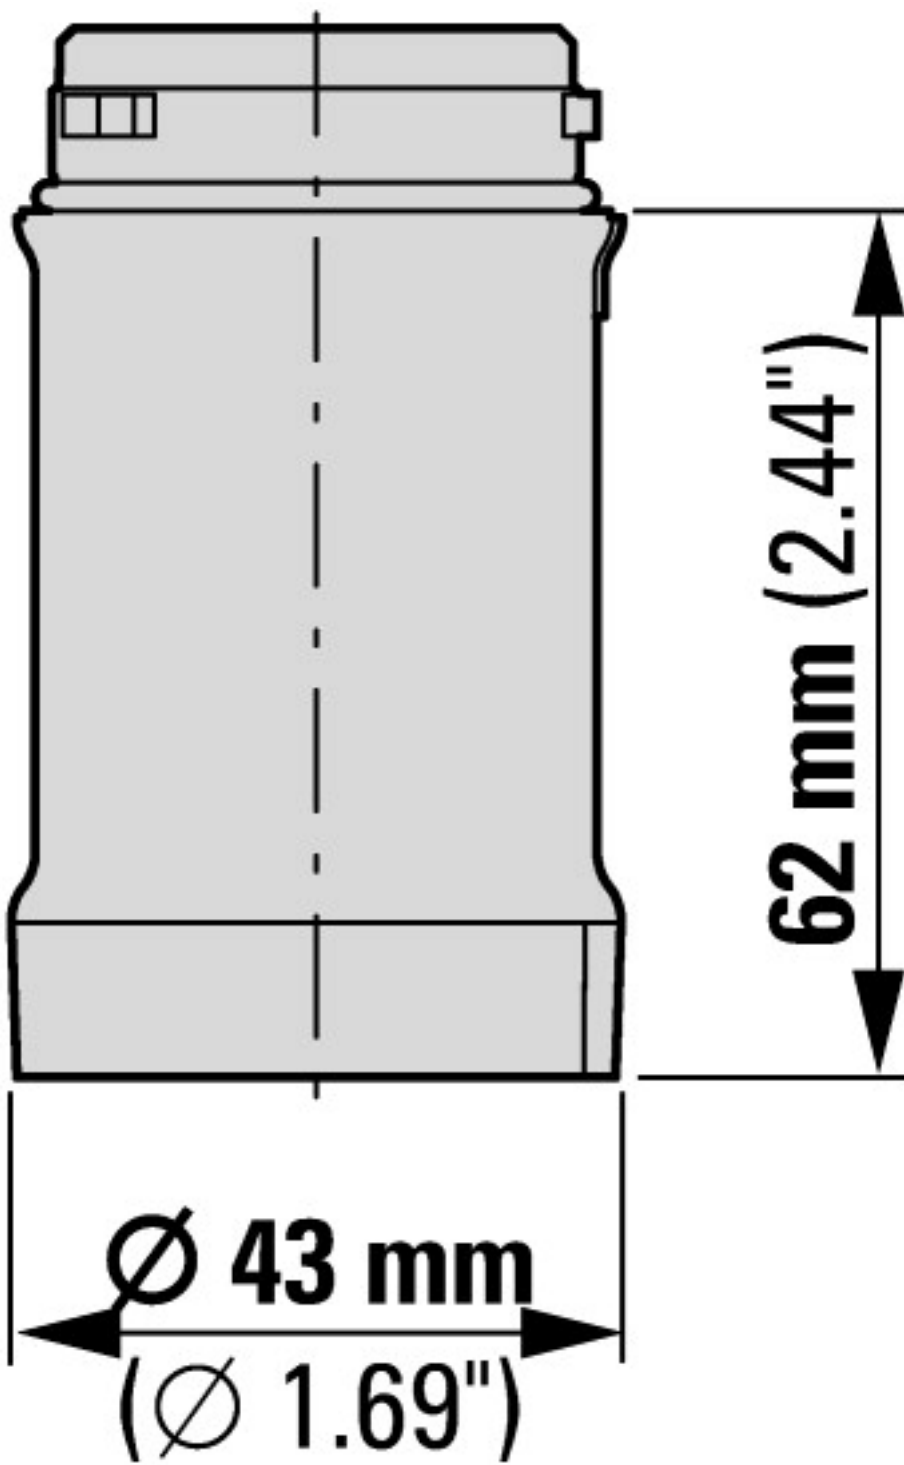

Additional product information (links)

IL047001ZU SL4 Main Instruction

IL047001ZU SL4 Main Instruction

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL047001ZU2013_02.pdf

IL047001ZU SL4, instructions générales

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL047001ZU2013_02.pdf